



CURB TRANSITION SLOPE (S) = 10:1 MAX.

SEE PROJECT PLANS FOR PAVEMENT TYPE AND BASE COURSE TYPE AND THICKNESSES

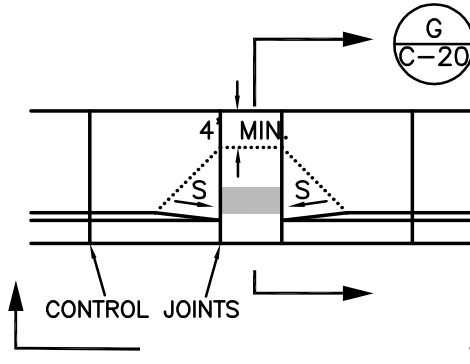


PERPENDICULAR CURB RAMP WITH LANDING

FINISHED BITUMINOUS PAVEMENT FLUSH TO 1/8" ABOVE GUTTER EDGE

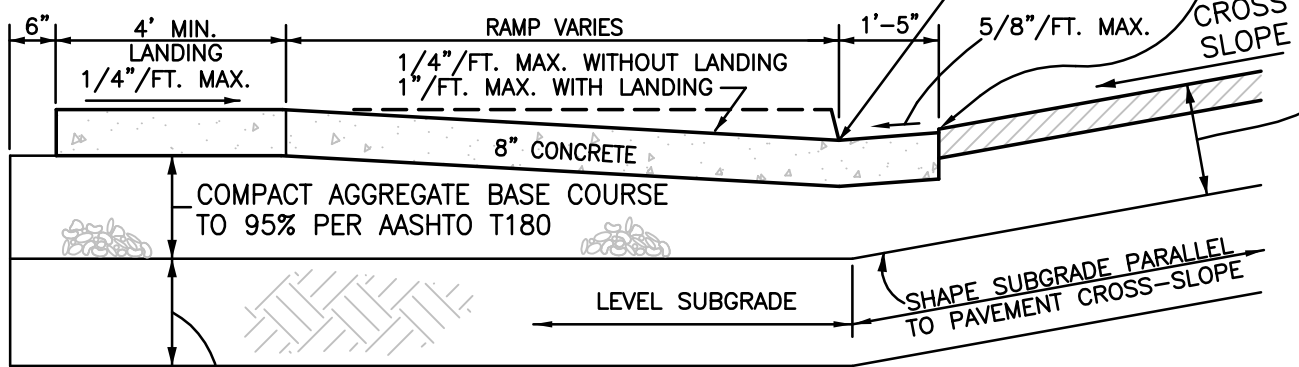

12" MIN. SUBGRADE RECONDITIONING - SEE PROJECT PLANS FOR COMPACTION REQUIREMENTS (AASHTO T99 OR T180) - SEE CDOT SPECS. SECTION 203.07 FOR MINIMUM % RELATIVE COMPACTION

SECTION G G G G G G G (WITHOUT FILLET)

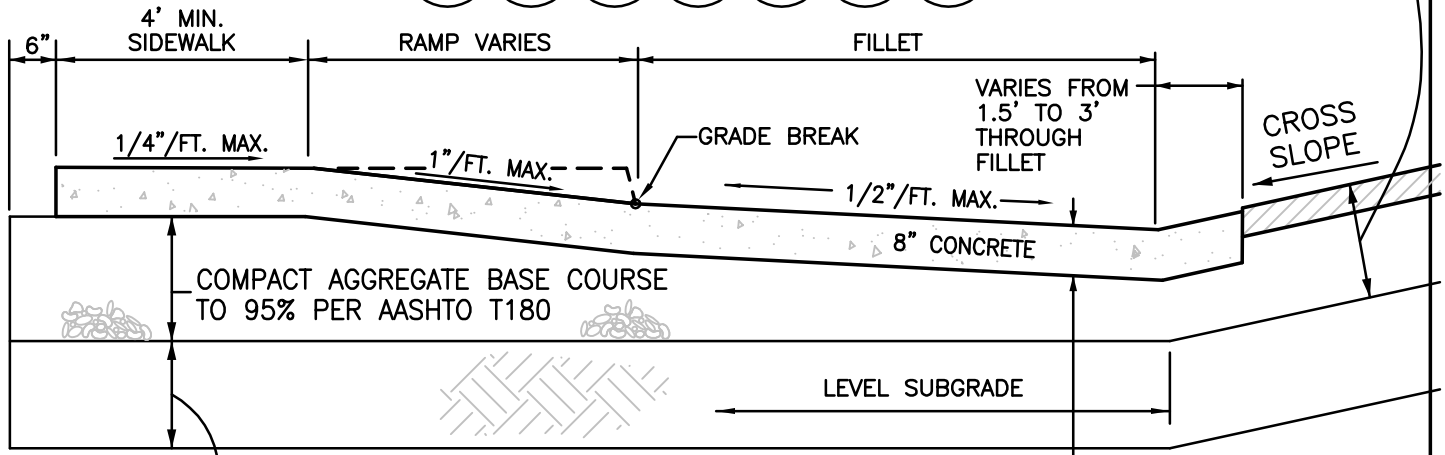

12" MIN. SUBGRADE RECONDITIONING - SEE PROJECT PLANS FOR COMPACTION REQUIREMENTS (AASHTO T99 OR T180) - SEE CDOT SPECS. SECTION 203.07 FOR MINIMUM % RELATIVE COMPACTION

SECTION H H H H H (WITH FILLET)

PERPENDICULAR CURB RAMP AND SECTIONS G AND H