



UNDOWELED ISOLATION JOINT


DOWELED ISOLATION OR EXPANSION JOINT

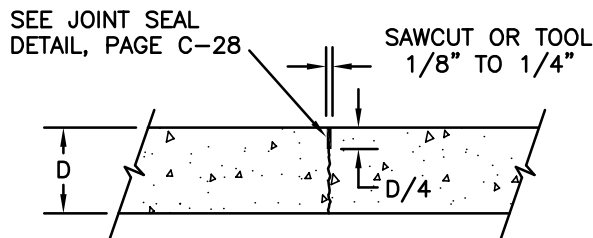


CONTRACTION JOINT

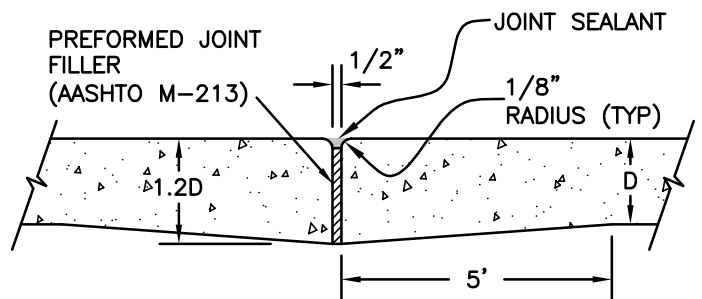

THICKENED EDGE ISOLATION JOINT

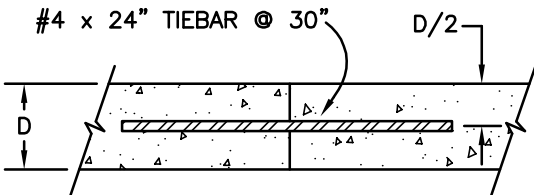

EMERGENCY CONSTRUCTION JOINT

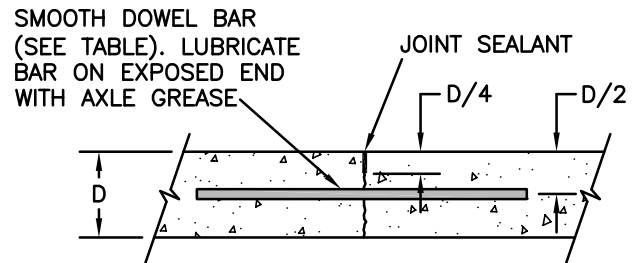

PLANNED CONSTRUCTION JOINT

NOTES

1. ALL JOINTS IN CONCRETE PAVEMENT SHALL BE SEALED PER DETAILS ON PAGE C-28.
2. SEE PAGE C-30 FOR LONGITUDINAL JOINT DETAILS.
3. ALL HANDTOOLED JOINTS SHALL BE FINISHED WITH A 1/4" OR SMALLER RADIUS.
4. SEE SECTION 705.01 OF THE S.S.F.R.B. FOR APPROVED JOINT SEALANTS.
5. MAKE A WATERTIGHT SEAL BETWEEN THE DOWEL BAR AND THE EXPANSION CAP WITH A RUBBER O-RING.

DOWEL SIZE FOR JOINTED REINFORCED PAVEMENTS AND CONSTRUCTION JOINTS		
SLAB DEPTH(D) INCHES	DOWEL DIAMETER INCHES	TOTAL DOWEL LENGTH INCHES
6.0 to 6.9	3/4	16
7.0 to 8.0	1	16

ALL DOWELS SPACED AT 12" CENTERS

JOINT DETAILS FOR CONCRETE PAVEMENT